



Model	Argos	Fastloc®	Depth	Temperature	Light Level	Life (days) ¹	L x W x H (mm) ²	Frontal Area (mm) ²	Weight (g)
SPOT-375	✓			✓		915	99 x 55 x 21	1480	152
SPOT-387	✓			✓		170	59 x 29 x 23	537	39
SPOT-395	✓			✓		740	75 x 40 x 19	868	86
SPLASH10-427	✓		✓	✓	Optional	260	86 x 54 x 26	1492	147
SPLASH10-BF-427	✓	✓		✓	Optional	240	86 x 54 x 26	1492	147
SPLASH10-F-427	✓	✓	✓	✓	Optional	240	86 x 54 x 26	1492	147

1. Lifespan estimates may increase or decrease based on your deployment. Please see your technical sales consultant for more information.

2. Height is measured from tag bottom to top surface of the tag body, excluding the additional abrasion-resistant epoxy protection.

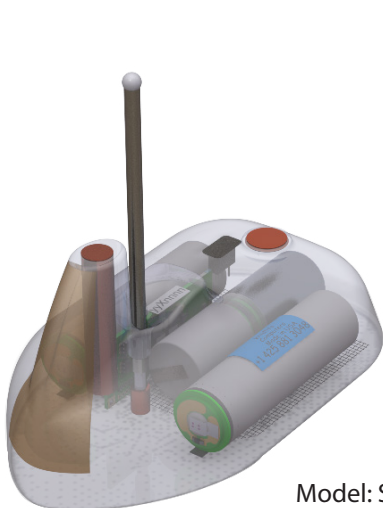

Model: SPOT-375

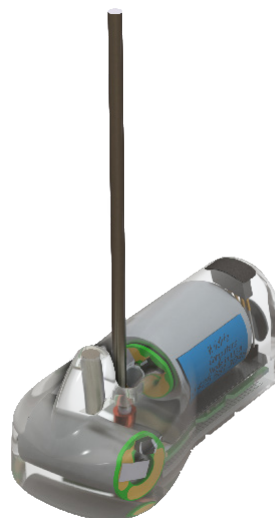

Model: SPOT-387



Model: SPOT-395

tags@wildlifecomputers.com
WildlifeComputers.com
 +1 (425) 881-3048

This is a small representation of our available tags. Tag features, colors, and specifications subject to change without notice. Comparative scale is approximate. Tags and antennas are not shown to scale. Lifespan estimates rely on programming, battery variability, temperature, power settings, features utilized, etc. © Wildlife Computers. All rights reserved. This is proprietary information and not to be reproduced, copied, or shared without written permission.

8310 154th Ave NE, Suite 150
 Redmond, WA, 98052 USA


v.25-01

To Learn More Call: +1 (425) 881-3048 or Email: tags@wildlifecomputers.com


Model	Argos	Fastloc [®]	Depth	Temperature	Light Level	Life (days) ¹	Frontal Area (mm ²)	L x W x H (mm ²)	Weight (g)
SPLASH10-344	✓		✓	✓	Optional	520	2430	86 x 86 x 28	231
SPLASH10-BF-344	✓	✓		✓	Optional	485	2430	86 x 86 x 28	231
SPLASH10-F-344	✓	✓	✓	✓	Optional	485	2430	86 x 86 x 28	231
SPLASH10-385	✓		✓	✓	Optional	540	2234	121 x 66 x 31	290
SPLASH10-BF-385	✓	✓		✓	Optional	500	2234	121 x 66 x 31	290
SPLASH10-F-385	✓	✓	✓	✓	Optional	500	2234	121 x 66 x 31	290

1. Lifespan estimates may increase or decrease based on your deployment. Please see your technical sales consultant.
2. Height is measured from tag bottom to top surface of the tag body, excluding the additional abrasion-resistant epoxy protection.

Model:
SPLASH10-427/
BF-427/ F-427

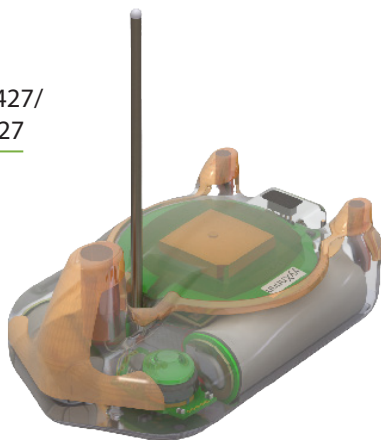

Model:
SPLASH10-344/
BF-344/ F-344

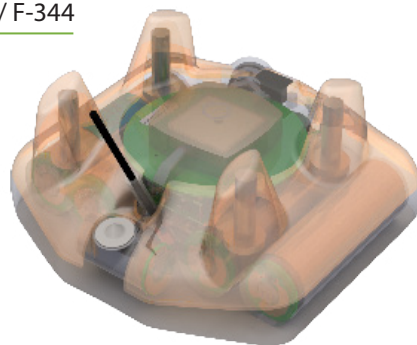

Model:
SPLASH10-385/
BF-385/ F-385



tags@wildlifecomputers.com
WildlifeComputers.com
+1 (425) 881-3048

8310 154th Ave NE, Suite 150
Redmond, WA, 98052 USA

This is a small representation of our available tags. Tag features, colors, and specifications subject to change without notice. Comparative scale is approximate. Tags and antennas are not shown to scale. Lifespan estimates rely on programming, battery variability, temperature, power settings, features utilized, etc. © Wildlife Computers. All rights reserved. This is proprietary information and not to be reproduced, copied, or shared without written permission.

To Learn More Call: +1 (425) 881-3048 or Email: tags@wildlifecomputers.com