



Model	Argos	Fastloc®	Depth	Temperature	Light Level	Life (days) ¹	L x W x H (mm)	Weight (g)
SPLASH10-F-296	✓	✓	✓	✓	Optional	470	86 x 85 x 29	192
SPLASH10-F-297	✓	✓	✓	✓	Optional	240	86 x 55 x 26	130
SPLASH10-F-385	✓	✓	✓	✓	Optional	510	120 x 66 x 50	290
SPLASH10-F-393	✓	✓	✓	✓	Optional	470	105 x 56 x 30	218

1. The above estimated tag life relies on battery variability, temperature, power settings, features utilized, etc. Life estimates are calculated using manufacturers' specifications and assumes 250 transmissions per day and, where applicable, 24 Fastloc® acquisitions per day.


These tags all feature the latest Fastloc® technology for improved satellite acquisition and maximized battery and tag duration. They also incorporate tough urethane abrasion protection (body armor) and robust nitinol antennas.



Model: SPLASH10-F-385




Model: SPLASH10-F-296

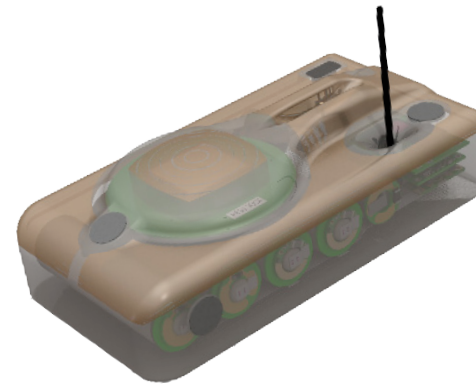

Model: SPLASH10-F-393

Model: SPLASH10-F-297

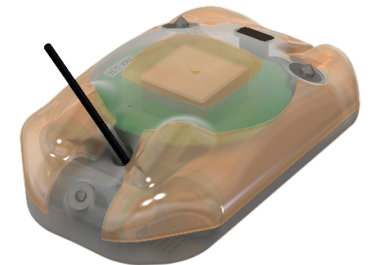

tags@wildlifecomputers.com
WildlifeComputers.com
+1 (425) 881-3048

8310 154th Ave NE, Suite 150
Redmond, WA, 98052 USA

This is a small representation of our available tags. Tag features and specifications subject to change without notice. Comparative scale is approximate. Argos antennas and sensor stalks not shown to length. © Wildlife Computers. All rights reserved.

v. 19-07 3.3