



OTARIIDS/PHOCIDS ARCHIVAL FASTLOC®

SPECIFICATION

Model	Fastloc®	Depth	Temperature	Light Level	L x W x H (mm)	Weight (g)	Life in Days ¹
TDR10-F-393	✓	✓	✓	Optional	105 x 56 x 30	215	1600
TDR10-F-296	✓	✓	✓	Optional	85 x 85 x 27	210	1600
TDR10-F-297	✓	✓	✓	Optional	86 x 55 x 29	132	800

1. The above estimated tag life relies on battery variability, temperature, power settings, features utilized, etc. Life estimates are calculated using manufacturers' specifications and assumes 96 Fastloc® acquisitions per day.


These tags all feature the latest Fastloc® technology for improved satellite acquisition and maximized battery and tag duration. Some also incorporate tough urethane abrasion protection (body armor). This is a small representation of the wide variety of archival tags we offer. All tags shown include sensors for depth, temperature, and light level. There are other configurations available with different battery capacities and sensor combinations.



Model: TDR10-F-393



Model: TDR10-F-296

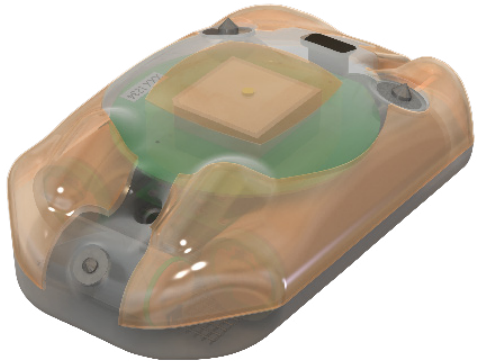

Model: TDR10-F-297

tags@wildlifecomputers.com
 WildlifeComputers.com
 +1 (425) 881-3048

8310 154th Ave NE, Suite 150
 Redmond, WA, 98052 USA

v. 19-08 8.6

This is a small representation of our available tags. Tag features and specifications subject to change without notice. Comparative scale is approximate. Tags are not shown to scale. © Wildlife Computers. All rights reserved.

To Learn More Call: +1 (425) 881-3048 or Email: tags@wildlifecomputers.com