




# OTARIIDS/PHOCIDS SPLASH FASTLOC® GPS SUITE SPECIFICATION

Model	Argos	Fastloc®	Depth	Temperature	Light Level	Life (days) <sup>1</sup>	L x W x H (mm)	Weight (g)
SPLASH10-F-296	✓	✓	✓	✓	Optional	485	85 x 85 x 27	210
SPLASH10-F-297	✓	✓	✓	✓	Optional	242	86 x 55 x 26	130
SPLASH10-F-393	✓	✓	✓	✓	Optional	485	105 x 56 x 30	218

1. The above estimated tag life relies on battery variability, temperature, power settings, features utilized, etc. Life estimates are calculated using manufacturers' specifications and assumes 250 transmissions per day and, where applicable, 24 Fastloc® acquisitions per day.

**These tags all feature the latest Fastloc® technology for improved satellite acquisition and maximized battery and tag duration. They also incorporate tough urethane abrasion protection (body armor) and robust nitinol antennas.**


Model: SPLASH10-F-297

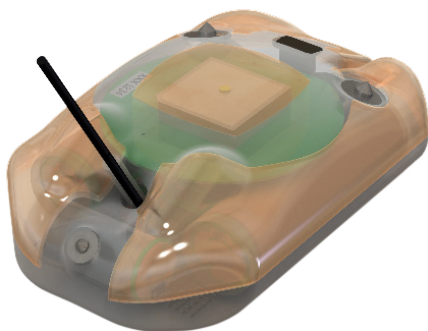

Model: SPLASH10-F-296



Model: SPLASH10-F-393

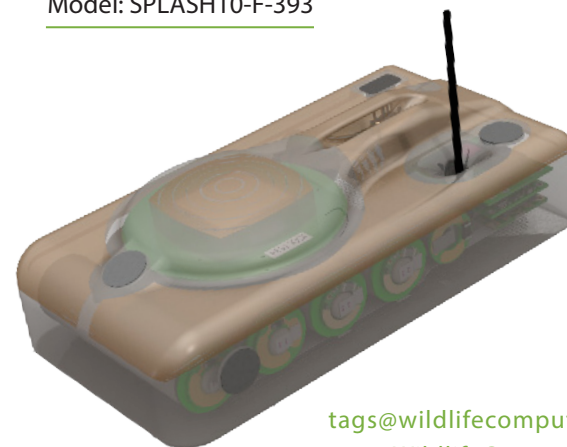

tags@wildlifecomputers.com  
WildlifeComputers.com  
+1 (425) 881-3048

8310 154th Ave NE, Suite 150  
Redmond, WA, 98052 USA

v. 19-07 8.3

This is a small representation of our available tags. Tag features and specifications subject to change without notice. Comparative scale is approximate. Argos antennas and sensor stalks not shown to length. © Wildlife Computers. All rights reserved.

To Learn More Call: +1 (425) 881-3048 or Email: [tags@wildlifecomputers.com](mailto:tags@wildlifecomputers.com)