


Model	Argos	Fastloc [®]	Depth	Temperature	Light Level	Life (days) ¹	L x W x H (mm)	Weight (g)
SPLASH10-393	✓		✓	✓	Optional	520	105 x 56 x 30	210
SPLASH10-BF-393	✓	✓		✓	Optional	485	105 x 56 x 30	218
SPLASH10-F-393	✓	✓	✓	✓	Optional	485	105 x 56 x 30	218
SPLASH10-296	✓		✓	✓	Optional	520	85 x 85 x 27	210
SPLASH10-BF-296	✓	✓		✓	Optional	485	85 x 85 x 27	210
SPLASH10-F-296	✓	✓	✓	✓	Optional	485	85 x 85 x 27	210

1. The above estimated tag life relies on battery variability, temperature, power settings, features utilized, etc. Life estimates are calculated using manufacturers' specifications and assumes 250 transmissions per day and, where applicable, 24 Fastloc[®] acquisitions per day.

These tags all feature tough urethane abrasion protection (body armor) and robust nitinal antennas. Similarly numbered tags may look the same, but offer different feature sets.

Model: SPLASH10-F-393 / BF-393 / 393

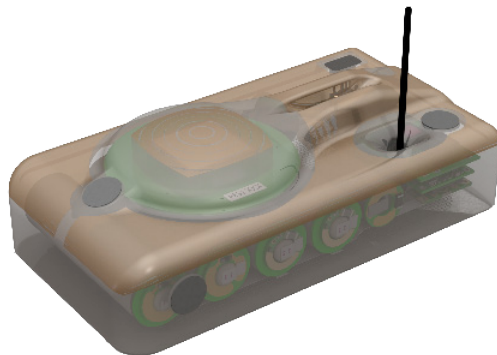

Model: SPLASH10-F-296 / BF-296 / 296



tags@wildlifecomputers.com
WildlifeComputers.com
+1 (425) 881-3048

8310 154th Ave NE, Suite 150
Redmond, WA, 98052 USA

This is a small representation of our available tags. Tag features and specifications subject to change without notice.
Comparative scale is approximate. Argos antennas and sensor stalks not shown to length. © Wildlife Computers. All rights reserved.

v. 19-07 8.2

To Learn More Call: +1 (425) 881-3048 or Email: tags@wildlifecomputers.com



OTARIIDS/PHOCIDS SPLASH SUITE SPECIFICATION


PG 2 OF 2

Model	Argos	Fastloc [®]	Depth	Temperature	Light Level	Life (days) ¹	L x W x H (mm)	Weight (g)
SPLASH10-297	✓		✓	✓	Optional	260	86 x 55 x 26	130
SPLASH10-BF-297	✓	✓		✓	Optional	242	86 x 55 x 26	130
SPLASH10-F-297	✓	✓	✓	✓	Optional	242	86 x 55 x 26	130

1. The above estimated tag life relies on battery variability, temperature, power settings, features utilized, etc. Life estimates are calculated using manufacturers' specifications and assumes 250 transmissions per day and, where applicable, 24 Fastloc[®] acquisitions per day.

These tags all feature tough urethane abrasion protection (body armor) and robust nitinal antennas. Similarly numbered tags may look the same, but offer different feature sets.

Model: SPLASH10-F-297 / BF-297 / 297

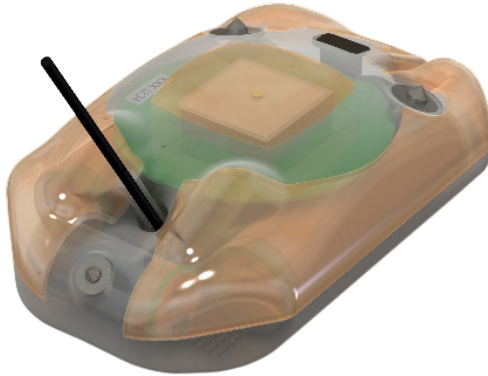

tags@wildlifecomputers.com
WildlifeComputers.com
+1 (425) 881-3048

8310 154th Ave NE, Suite 150
Redmond, WA, 98052 USA

This is a small representation of our available tags. Tag features and specifications subject to change without notice.
Comparative scale is approximate. Argos antennas and sensor stalks not shown to length. © Wildlife Computers. All rights reserved.

v. 19-07 8.2

To Learn More Call: +1 (425) 881-3048 or Email: tags@wildlifecomputers.com